



Fiberglass Threaded Rod

| Part # | Description | Thread Shear Strength Using FRP Nut in Tensile, lbs. |
|--------|--|---|
| TR375 | 3/8" Vinylester Fiberglass All-Thread x 8' | 1,250 |
| TR500 | 1/2" Vinylester Fiberglass All-Thread x 8' | 2,200 |
| TR625 | 5/8" Vinylester Fiberglass All-Thread x 8' | 3,100 |
| TR750 | 3/4" Vinylester Fiberglass All-Thread x 8' | 4,500 |
| TR1000 | 1" Vinylester Fiberglass All-Thread x 8' | 6,500 |




Threaded Rod Couplers

| Part # | Description | Thread Shear Strength, lbs. |
|----------|-------------------------|-----------------------------|
| CU375PU | 3/8" All-Thread Coupler | 1,250 |
| CU500PU | 1/2" All-Thread Coupler | 2,200 |
| CU625PU | 5/8" All-Thread Coupler | 3,100 |
| CU750PU | 3/4" All-Thread Coupler | 4,500 |
| CU1000PU | 1" All-Thread Coupler | 6,500 |



Hex Flange Nuts

| Part # | Description |
|--------|---------------------|
| FN375 | 3/8" Hex Flange Nut |
| FN500 | 1/2" Hex Flange Nut |
| FN625 | 5/8" Hex Flange Nut |
| FN750 | 3/4" Hex Flange Nut |
| FN1000 | 1" Hex Flange Nut |

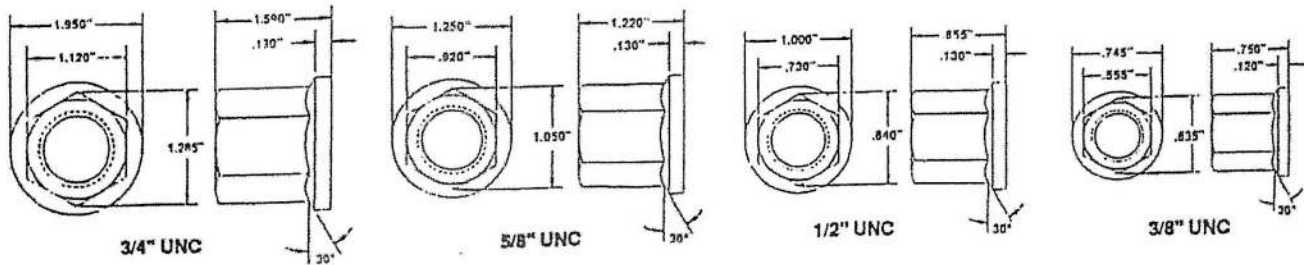

Lee Composites, Inc.
PO Box 130363
The Woodlands, TX 77393

www.leecomposites.com

boblee@leecomposites.com

(281) 376-6146 Office
(281) 782-2477 Mobile